



# CompactRotoSonic XL170 MAX DUO



Ask for your  
tailored  
OPEX ROI  
calculation !

# CRS XL170 MAX DUO: Multi-purpose sonic rig

- Mineral sampling
- Environmental exploration
- Geotechnical sampling and testing
- Geo-constructional drilling
- Seismic drilling
- Customized solutions

The CompactRotoSonic crawler XL170 MAX DUO (CRS XL170 MAX DUO) is equipped with a CompactRotoSonic drillhead as well as a four speed rotation head. Easy change from Sonic drillhead to rotary head by shifting trolleyboard. To combine Sonic sampling and diamond core drilling in the same borehole.



**CRS XL170 MAX DUO**

CompactRotoSonic HO Drill head	Metric	Imperial
Max. frequency	0 - 150 Hz	0 - 150 Hz
Sonic vibration oscillator output force	150 kN	33.8 k lbf
2 eccentrics, mechanically synchronized		
Rotation torque: clockwise 0-120 rpm	2,650 Nm @ 185 bar	1,955 ft-lbf @ 2,680 psi
Rotation torque: counter clockwise	3,000 Nm @ 210 bar	2,210 ft-lbf @ 3,045 psi
Head tilt max.	70°	70°
Type of damper / buffer	rubber 4x	rubber 4x
Max. hydraulic pressure on sonic	230 bar	3,335 psi
Mass of head	600 kg	1,350 lbf
Pull up force in combination with sonic	5,000 daN	11,240 lbf
Pull down force in combination with sonic	5,000 daN	11,240 lbf
Pull up force static	10,000 daN	22,480 lbf
Pull down force static	5,500 daN	12,400 lbf
Drilling under angle perpendicular driving direction	10°	10°
Advised power from rig engine	127 kW	170 HP

4-Speed rotary drill head	Metric	Imperial
Hydraulically driven in serial or parallel mode mechanical 2 speed selection		
Shock absorber		
Sub saver from rotary spindle		
Air / Mud swivel, inlet available	35 mm	1 3/8"
Torque / speed to select from	450 Nm @ 840 rpm to 5,600 Nm @ 65 rpm	331 ft-lbf @ 849 rpm to 4,130 ft-lbf @ 65 rpm




Gear ratio	1 <sup>^</sup> speed		2 <sup>^</sup> speed		3 <sup>^</sup> speed		4 <sup>^</sup> speed	
	daNm	rpm	daNm	rpm	daNm	rpm	daNm	rpm
1 <sup>^</sup>	35	950	70	425	125	270	250	135
2	42	860	84	430	150	240	300	120
3	55	700	110	350	190	200	370	100
4	68	540	136	270	240	150	480	75
5	80	430	160	215	290	120	580	60
6	100	340	200	170	355	100	710	50
7	115	270	230	135	410	80	820	40

Rig	Metric	Imperial
Caterpillar 4 cylinder water cooled engine, Tier 5	129 kW	173 HP
Dimensions folded (L x W x H) approx.	6,000 x 2,100 x 2,890 mm	19'8" x 6'11" x 9'6"
Height (when drilling) max.	6,000 mm	19'8"
Mass approx.	10,250 kg	22,600 lbs
Fuel tank (diesel)	170 liter	45 gallon
Load sensing hydraulic system	Yes	Yes
Control panel on turning arm	Yes	Yes
High pressure water pump	19 l/min. @ 210 bar	5 gpm @ 3,045 psi
Large flow water pump	285 l/min. @ 48 bar	75 gpm @ 700 psi
Aluminum water tank	500 liter	132 gallon
Rubber tracks	Yes	Yes
Radio remote for driving	Yes	Yes
Work lights	4	4

Mast	Metric	Imperial
Stroke	5,200 mm / 5,700 mm	17" / 19"
Mast dump	1,000 mm	3'3"
Pull up	120 kN	26,977 lbf
Pull down	68 kN	15,300 lbf
Pull up and down speed	27 m/min up, 36 m/min down	89 ft/min, 118 ft/min
Double hydraulic break out clamp	60 - 280 mm	2 <sup>3</sup> / <sub>8</sub> " - 11"
Adjustable clamping force of	140 kN	31,500 lbf
Break out torque	38 kNm	28,000 ft-lbf
Main winch	2,000 daN, 55 m/min 30 m	4,496 ft-lbf, 180 ft/min, 98 ft
Hydraulic jib boom with wireline winch	1,000 daN, 100 m/min 200m	2248 ft-lbf, 328 ft/min, 656 ft

Rod / casing handler		
Mechanical separators among different rod layers	Included	Included
Casing / drill rod storage depends on diameter and length	Included	Included

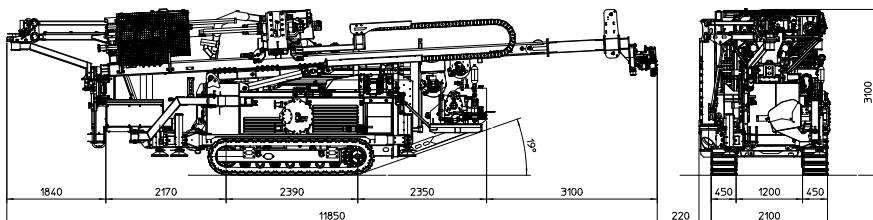



Options	Metric	Imperial
SPT auto drop hammer with blow counter on control panel		
Casing lifter mounted on break out clamp	200 kN stroke 300 mm	45,000 lbs stroke 12"
Mud pump triplex piston	285 liter @ 48 bar	75 gallon @ 700 psi
SPX40 hose pump	114 l/min @ 10 bar	30 gpm @ 145 psi
Steel tracks or rubber pads		
Triple floatable clamp	800 mm	32"
ManipAll 250 (remote controlled or manual)		
Safety cage		
Fully remote controlled		



## Eijkelkamp Customer Service Agreement

Royal Eijkelkamp provides the possibility to add a tailor fit service contract to the extensive range of machines we offer. We call these the Eijkelkamp Customer Service Agreements. We have three types of Customer Service Agreements called Start, Pro and Royal. The Royal type is a service contract that can be tailor fit to the needs of the customer. All Eijkelkamp Customer Service Agreements will be delivered with the Eijkelkamp Service Assistant, this is an advanced track & trace system that is available for use by customer and driller on site via the mobile phone application and web browser.

For more information on demos, pilot projects or personal advice contact our sales department !

For urgent service calls and/or technical information contact or special service telephone: +31 313 800 967

**ROYAL Eijkelkamp**  
Meet the difference

Nijverheidsstraat 9  
6987 EN Giesbeek  
The Netherlands

T +31 313 880 200  
E info@sonicsampdrill.com  
I royaleijkelkamp.com